

LXT/LXW Technical Data

Electric Tractor and Platform Truck

LXT 120/Li-Ion

LXT 180/Li-Ion

LXT 250/Li-Ion

LXT 250L/Li-Ion

LXT 300/Li-Ion

LXT 350/Li-Ion

LXW 20/Li-Ion

LXW 30/Li-Ion



LXT/LXW Electric Tractor and Platform Truck

Efficiency in action

This specification sheet, which conforms to VDI Guideline 2198, provides the technical values for the standard equipment only. Different tyres, other masts, the use of accessories etc., may result in other values.




Features	1.1	Manufacturer				STILL	STILL	STILL	STILL	STILL	STILL	STILL	STILL	
	1.2	Manufacturer's type designation				LXT 120/Li-Ion	LXT 180/Li-Ion	LXT 250/Li-Ion	LXT 250L/Li-Ion	LXT 300/Li-Ion	LXT 350/Li-Ion	LXW 20/Li-Ion	LXW 30/Li-Ion	
	1.3	Drive				Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	
	1.4	Operation				Seated	Seated	Seated	Seated	Seated	Seated	Seated	Seated	
	1.5	Load capacity/load		Q	kg	300	300	300	300	300	300	2000	3000	
	1.5.1	Towing capacity		Q	kg	12000	18000	25000	25000	30000	35000	6000	6000	
	1.7	Rated drawbar pull		F	N	2400	3600	5000	5000	6000	7000	900/1200	900/1200	
	1.9	Wheel base		y	mm	1408	1408	1551	1906	1906	2156	1906	1906	
Weights	2.1	Service weight incl. battery			kg	3883	3883	4450	5250	5250	6000	4205 ¹	4205 ¹	
	2.2	Axle load, laden		front/rear	kg	2079/2104	2079/2104	2900/1850	2928/2622	2928/2622	3220/3080	2620 ¹ /3585 ¹	2620 ¹ /3585 ¹	
	2.3	Axle load, unladen		front/rear	kg	2010/1873	2010/1873	2780/1670	2808/2442	2808/2442	3150/2850	2320 ¹ /1885 ¹	2320 ¹ /1885 ¹	
Wheels/chassis	3.1	Tyres				Pneumatic/superelastic		Pneumatic/superelastic		Pneumatic/superelastic		Pneumatic/superelastic		
	3.2	Tyre size		front		6.00 R 9		6.00 R 9		6.00 R 9		6.00 R 9		
	3.3	Tyre size		rear		7.00 R 12		7.00 R 12		7.00 R 12		7.00 R 12		
	3.5	Number of wheels (x = driven)		front/rear		2/2x		2/2x		2/2x		2/2x		
	3.6	Track width, front		pneumatic/superelastic	b ₁₀	mm	1102/1120		1102/1120		1102/1120		1102/1120	
	3.7	Track width, rear			b ₁₁	mm	1060		1060		1060		1060	
	4.7	Height to top of overhead guard, (cabin)			h ₆	mm	1950		1950		1950		1950	
Basic dimensions	4.8	Seat height rel. to SIP/stand height			h ₇	mm	907		907		907		907	
	4.12	Coupling height			h ₁₀	mm	270, 330, 380, 440 (RO244)		270, 330, 380, 440 (RO244)		270, 330, 380, 440 (RO244)		270, 330, 380, 440 (RO244)	
	4.13	Loading height unladen			h ₁₁	mm	1060		1060		1060		897	
	4.16	Length of loading platform			l ₃	mm	1396		1396		1895		2200/2600 ²	
	4.17	Cabin overhang			l _{5.1}	mm	1055		1055		1055		1055	
	4.17.1	Rear overhang			l ₅	mm	624		624		707		665 (1065 ²)	
	4.18	Width of loading platform			b ₉	mm	1056-1176		1056-1176		1056-1176		1300	
	4.19	Overall length			l ₁	mm	3086		3086		3668		3918	
	4.21	Overall width			b ₁ /b ₂	mm	1310		1310		1310		1310	
	4.32	Ground clearance, centre of wheel base			m ₂	mm	150		150		150		150	
	4.34	Working aisle width without safety distance/safety margin			A _{st}	mm	4500		4500		4696		5230	
	4.35	Turning radius		front/rear	W _a	mm	2737/1563		2737/1563		2884/1612		3280/1750	
	4.36	Smallest pivot point distance			b ₁₃	mm	881		881		931		1071	
Performance data	5.1	Driving speed		laden/unladen	km/h	15/22		17/23		18/25		20/25		
	5.5	Drawbar pull, unladen			N	2400		3600		5000		5000		
	5.6	Max. drawbar pull, unladen			N	12000		15000		18000		20000		
	5.10	Service brake				Electric/hydraulic		Electric/hydraulic		Electric/hydraulic		Electric/hydraulic		
Drive	6.1	Drive motor, rating KB 60 min			kW	2 x 10.5 kW		2 x 10.5 kW		2 x 10.5 kW		2 x 10.5 kW		
	6.3	Battery according to DIN 43531/35/36 A, B, C, no				43536 A		43536 A		43536 A		43536 A		
	6.4	Battery voltage			V	80		80		80		80		
	6.4.1	Battery designation		min./max.	K ₅	Ah	465		465		620		775/930	
	6.5	Battery weight			kg	1238		1238		1210/1558		1863/2178		
	6.6	Energy consumption in accordance with EN 16796			kWh/h	5.82		6.79		7.76		8.73		
Miscellaneous	8.1	Type of drive control				STILL MCU 3		STILL MCU 3		STILL MCU 3		STILL MCU 3		
	10.7	Sound pressure level L _{pAZ} (operator's ear)			dB(A)	62		62		62		62		
	10.8	Trailer coupling, item/DIN type				Rockinger 244		Rockinger 244		Rockinger 244		Type HSM 2140		


¹ With platform 2200 mm

² Optionally with platform 2600 mm


LXT/LXW Electric Tractor and Platform Truck
 Technical Drawings

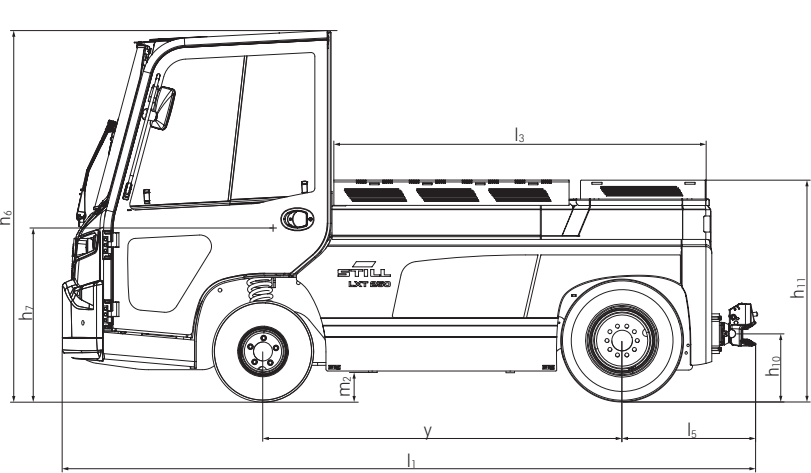


LXT side view

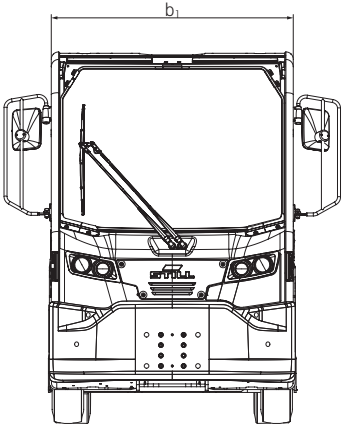


LXT front view

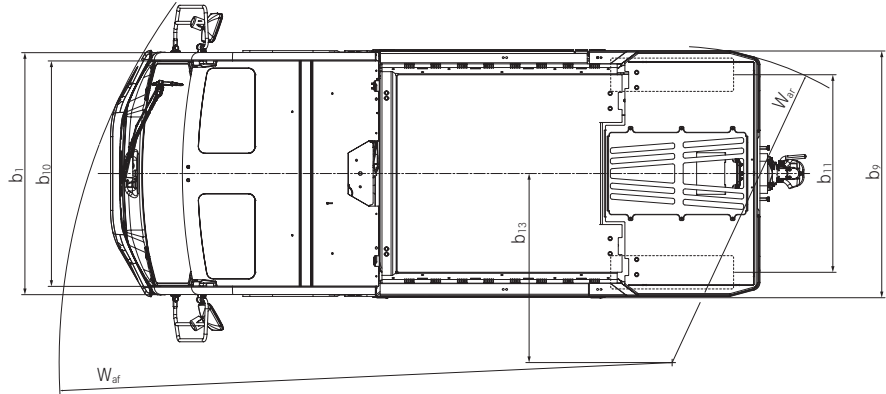


LXT top view

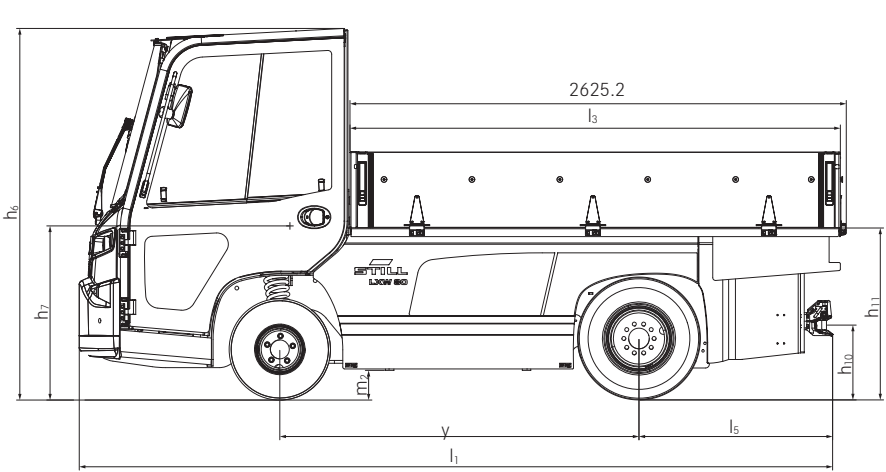

LXW side view

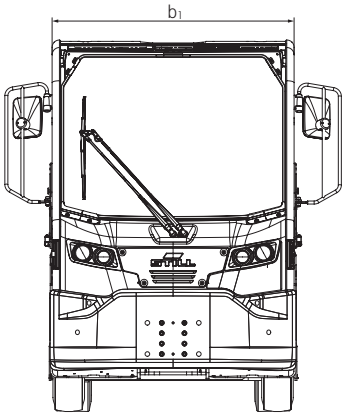


LXW front view

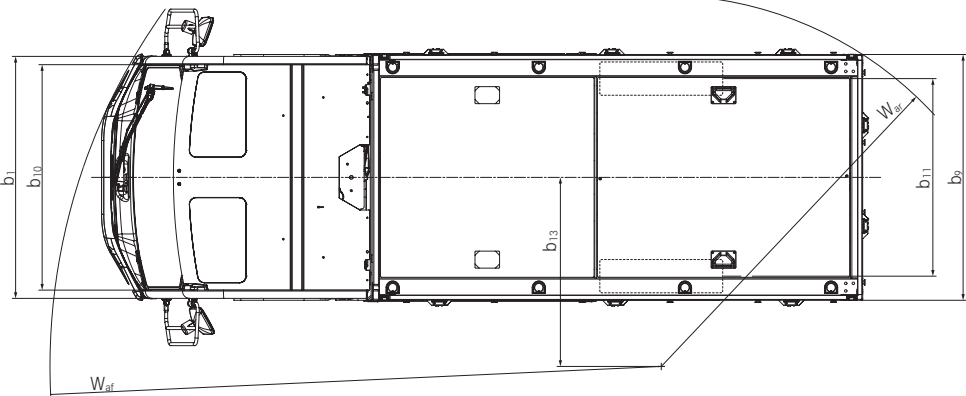


LXW top view

LXT/LXW Electric Tractor and Platform Truck Performance Diagram


LXT 120

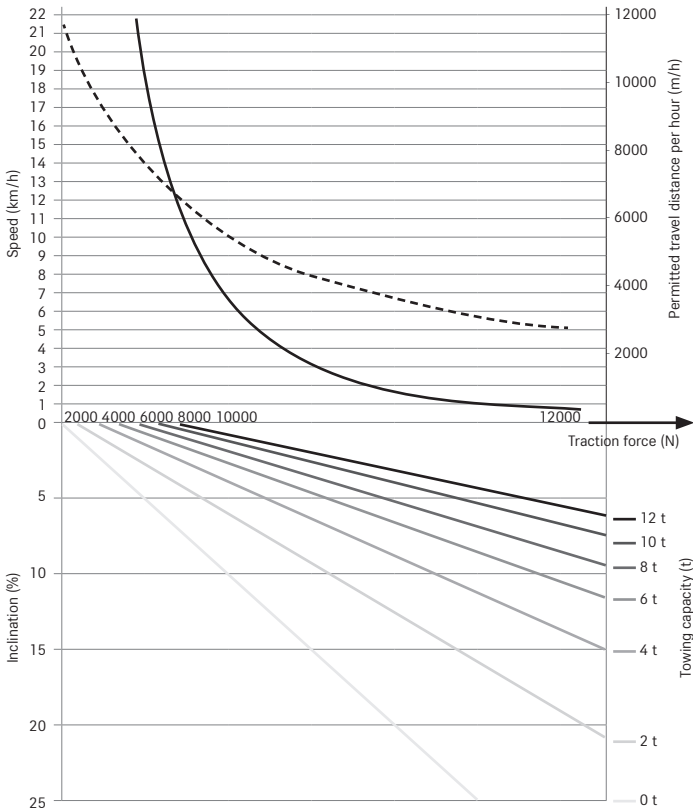

LXT 180

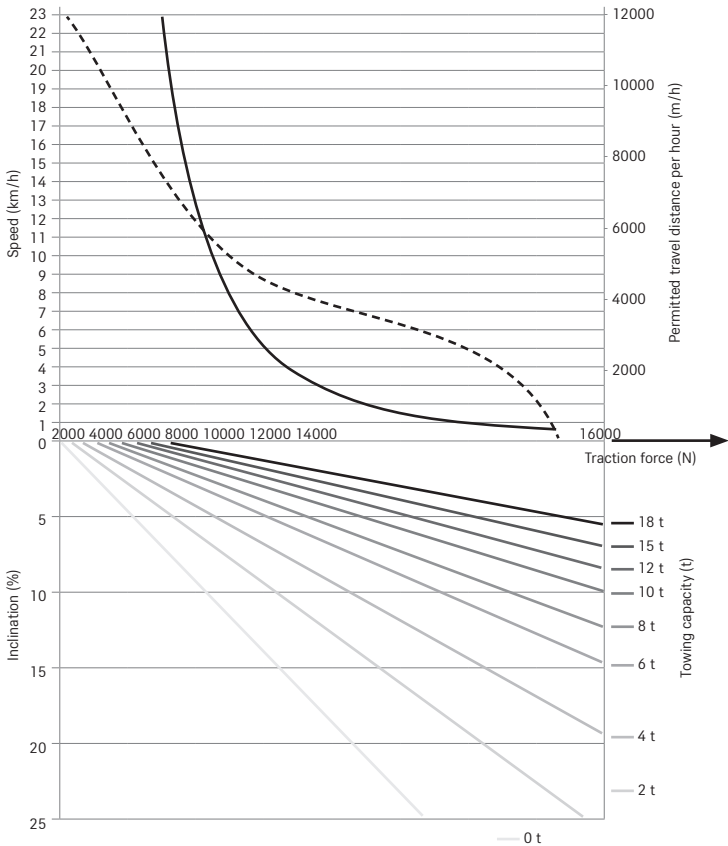

LXT 250

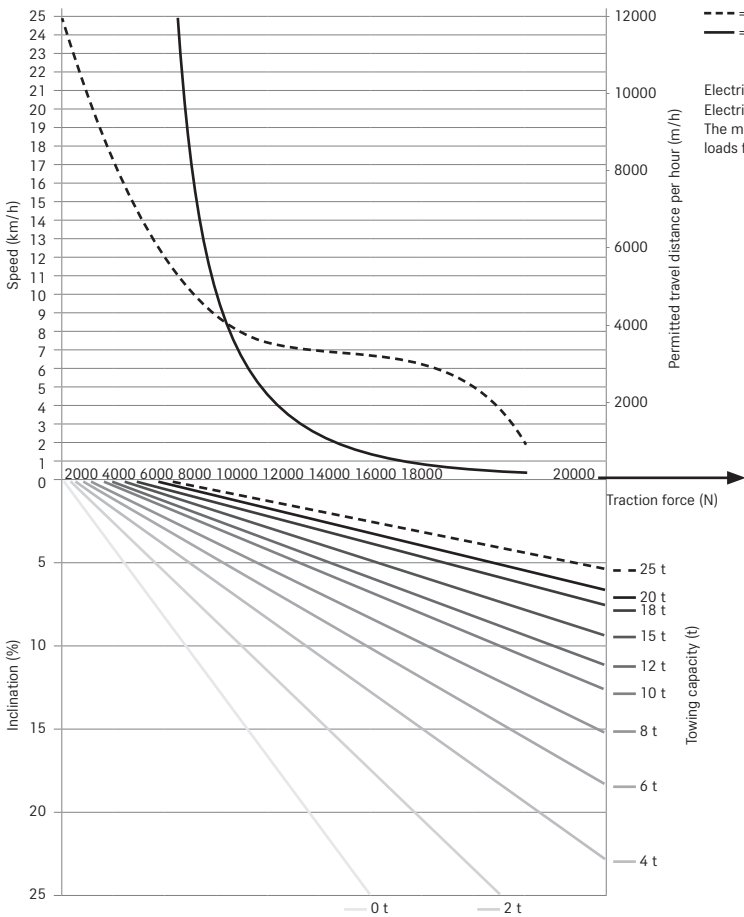


--- = Speed
— = Permitted travel distance per hour


Electric platform truck LXW: It is recommended to use braked trailers only.
Electric tractor LXT: It is recommended to use unbraked trailers only for towing on level ground.
The maximum loads for unbraked trailers are shown in the table below.
loads for unbraked trailers shown in the following table.

LXT/LXW Electric Tractor and Platform Truck Performance Diagram


LXT 300

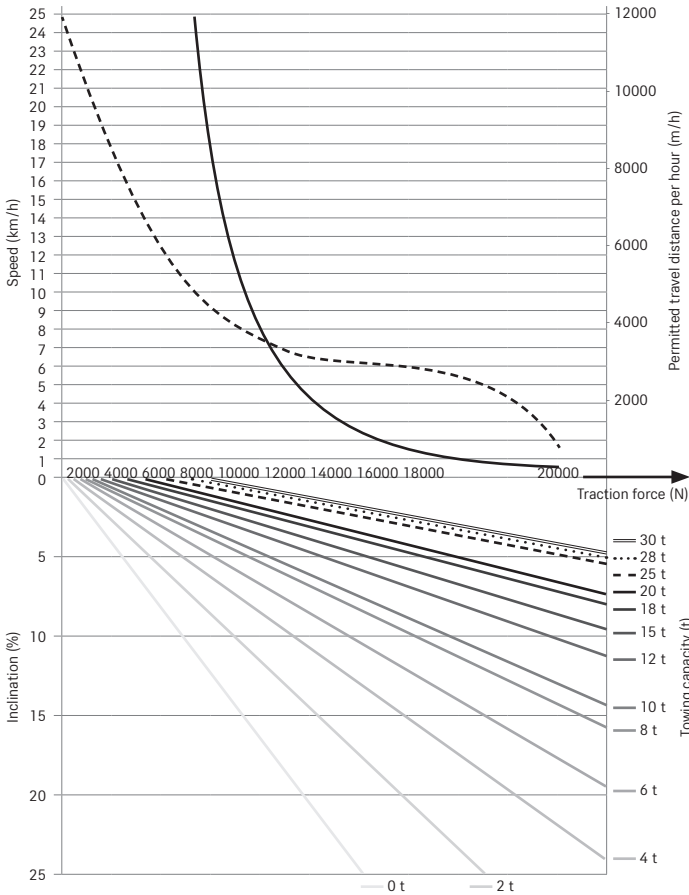

LXT 350

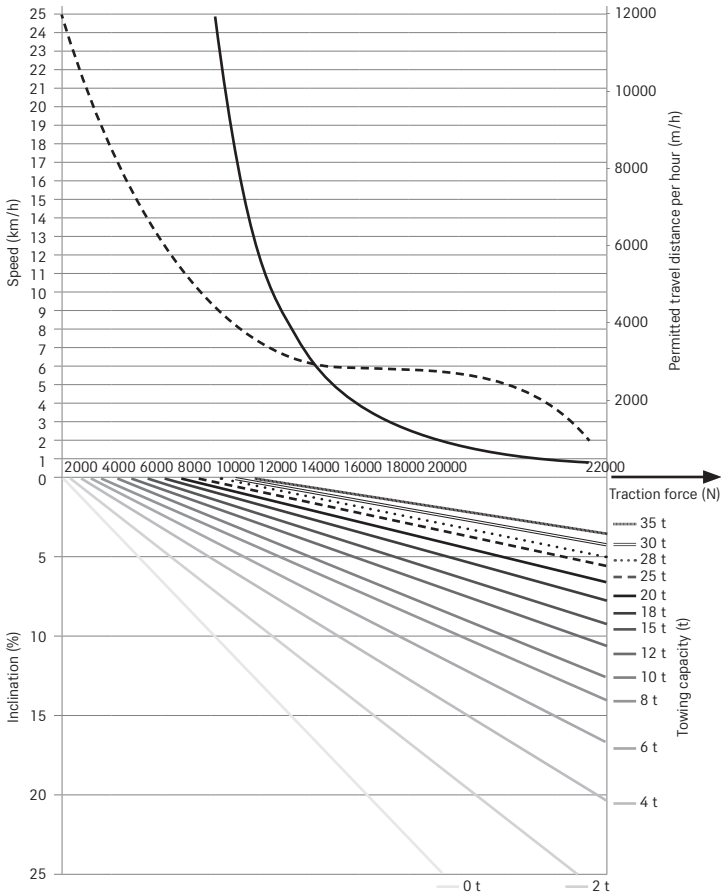

LXW 20/30

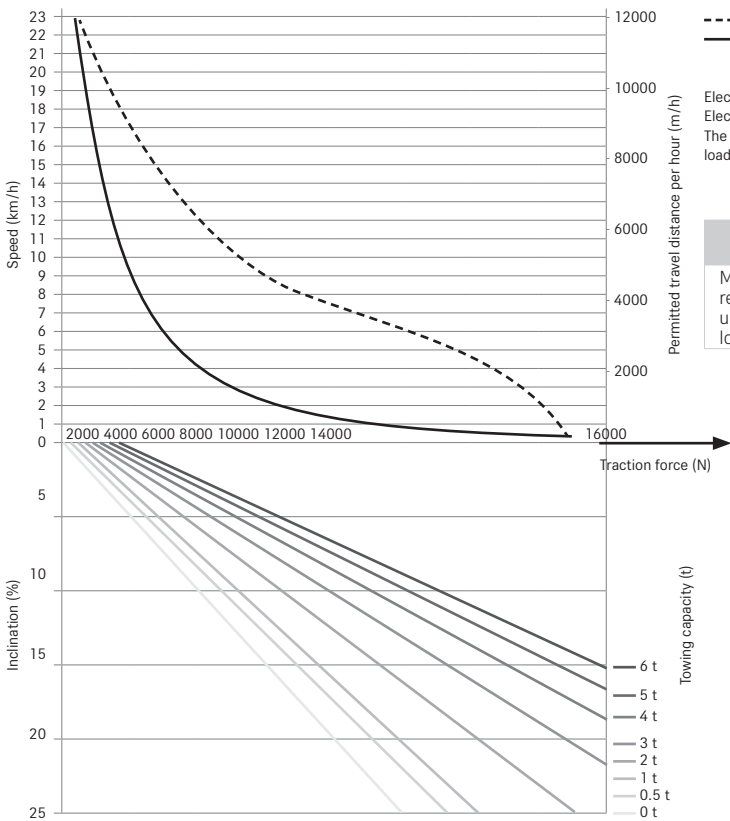

Speed

—

Permitted travel distance per hour

Electric platform truck LXW: It is recommended to use braked trailers only.
 Electric tractor LXT: It is recommended to use unbraked trailers only for towing on level ground.
 The maximum loads for unbraked trailers are shown in the table below.
 loads for unbraked trailers shown in the following table.

	LXT 120	LXT 180	LXT 250/250L	LXT 300	LXT 350
Maximum recommended unbraked trailer load	4 t	7 t	10 t	11 t	12 t

LXT/LXW Electric Tractor and Platform Truck

Detailed Photos



The optional STILL Flashlight, securely installed below the roof, provides a warning for people in front of and behind the truck



The optional roof window provides an unobstructed view upwards and additional ventilation



Safe and fast charging without opening the battery door thanks to the optional quick charging flap



The robust operator's cabin is spacious and can be flexibly configured, e.g. with different doors or additional mirrors



The optional temperature control creates a consistently pleasant climate in the operator's cabin

LXT/LXW Electric Tractor and Platform Truck

Detailed Photos



Working comfort in a class of its own with optional MSG 75 air sprung seat: Superior suspension on cushioned and sprung chassis




The smooth-running steering wheel with knob ensures top ergonomics. The operator also has an overview of all the available information on a large display



Lateral battery changing as standard, for easy and safe replacement without the need for a crane



Optional vertical battery changing also available for many truck types

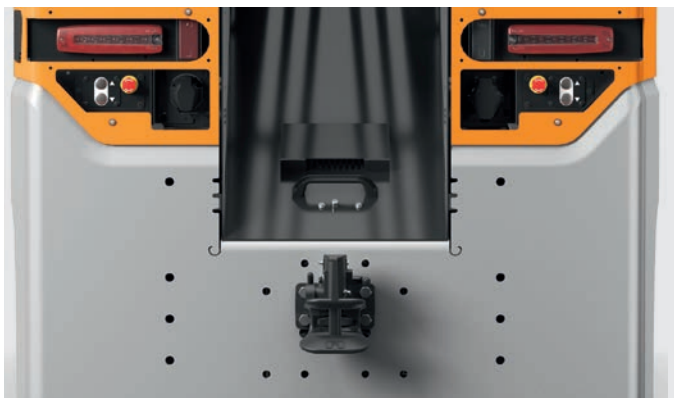

Reversing devices at the rear ensure safe and efficient coupling and decoupling



Simply easy

- Constant overview of all relevant information thanks to the large, colour STILL Easy Control display with many individual setting options
- Ready for use at all times: quick and easy charging and interim charging anytime and anywhere with the quick charging socket and on-board charger



Simply powerful

- Pulls up to 35 tonnes trailing load thanks to powerful twin-engine drive
- Ideally prepared for harsh working environments thanks to robust protection devices for the truck and many of its components



Simply safe

- Efficient and safe on any ramp: the unique Descent Speed Regulation (DSR) assistance system automatically regulates travel speed depending on load and tilting angle
- Numerous windows, telescopic mirrors and a rear-view camera ensure safe driving with the best all-round visibility



Simply flexible

- Versatile application possibilities due to the modular vehicle portfolio and a multitude of individual equipment variants



Simply connected

- Uncomplicated integration of the truck into control systems such as STILL neXXt fleet via an optional interface
- Access protection guarantees complete usage control, safety and damage minimisation

Simply Efficient



LXT/LXW Electric Tractor and Platform Truck

Efficiency in action

Descent Speed Regulation: safe travel on ramps with speed regulation that responds to the load and inclination angle

Safe all-round warning with STILL Flashlight installed within the truck contour without elevation

Versatile application possibilities due to the extensive vehicle portfolio with 12 to 35 tonnes tractive force and many equipment options

Everything at a glance thanks to STILL Easy Control and the colour multifunction display with individual assignment options




Efficiency in action: an extensive truck portfolio, wide range of modular equipment options and impressive performance. The LXT 120/350 and LXW 20/30 tractors and transport vehicles are impressive even in rough environments and prove that efficiency and top performance can be perfectly combined. The DSR (Descent Speed Regulation) assistance system even takes your handling capacity to a new level: As soon as you reach a slope, the truck determines the exact tilt angle, takes into account the current load weight and automatically adjusts the speed to the current conditions. The result: with towing loads of up to 35 tonnes, you can adapt to any situation while moving as quickly as possible at the same time! The tractors and transport vehicles can

be charged quickly and easily without opening the cover thanks to the quick charging socket or on-board charger. However, this is surprisingly rarely necessary thanks to its impressive energy efficiency. When in use, the smart STILL Easy Control on-board computer is your control centre. The large display provides an overview of all the relevant information, while functions such as various driving programmes are activated by the click of a button. And as if the prospect of a safe, smart and speedy goods flow weren't enough to tick your boxes, just wait until you've tried out the comfortable ergonomics and dynamic driving experience.

Descent Speed Regulation

The optional Descent Speed Regulation (DSR) assistance system ensures safe travel on ramps at all times with automatic speed regulation which is dependent on the current load and tilting angle.

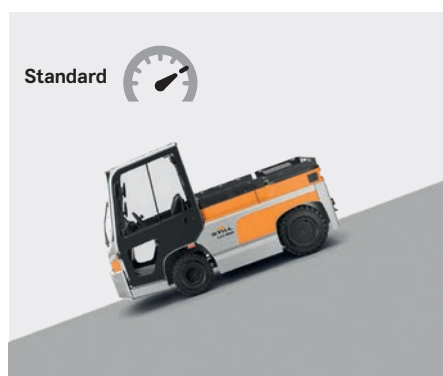

Basic: previously set speed on descent is manually limited via the switch.



Eco: gradient shown on the display, previously set speed is limited to a predefined value when a gradient is detected.



Premium: gradient shown on the display, speed reduction depending on load and gradient.

LXT/LXW Electric Tractor and Platform Truck Equipment Variants



		LXT 120/ LXT 180	LXT 250	LXT 250L/ LXT 300	LXT 350	LXW 20/ LXW 30
Cabin	Steel overhead guard with open design	●	●	●	●	●
	Weatherproof cabin	○	○	○	○	○
	Weatherproof cabin with strap opening	○	○	○	○	○
	Tarpaulin cabin	○	○	○	○	○
	Full cabin	○	○	○	○	○
	Full cabin with sliding doors	○	○	○	○	—
Assistance systems	Descent Speed Regulation Basic	●	●	●	●	●
	Descent Speed Regulation Eco	○	○	○	○	○
	Descent Speed Regulation Premium	○	○	○	○	○
	Load measurement and load display	○	○	○	○	○
	Rear-view camera	○	○	○	○	○
	Reversing device	●	●	●	●	○
Energy	Lithium-ion version	○	○	○	○	○
	On-board charger	○	○	○	○	○
	Lateral battery change	●	●	●	●	●
	Crane-loadable battery change	○	○	○	—	—
Towing coupling	3-stage coupling at the rear	○	○	—	○	—
	Rockinger 244A, rear	●	●	—	—	●
	HSM 2140, rear	○	○	●	●	○
	Trailer coupling at front	○	○	○	○	○
	Tugger train hydraulics	○	○	○	○	—
Platform	Rail 100 mm high	●	●	●	●	—
	Rail 350 mm high	○	○	○	○	—
	Lashing eyes	—	—	—	—	●
	Rail, hinged	—	—	—	—	○
	Tarpaulin roof arch construction	—	—	—	—	○
Tyres	Pneumatic tyres	●	●	●	—	●
	Superelastic tyres	○	○	○	●	○
Operator's cab equipment	Steering wheel with knob	○	○	○	○	○
	Courtesy light	○	○	○	○	○
	Heating and air-conditioning	○	○	○	○	○
	Radio with Bluetooth	○	○	○	○	○
	Heated front windscreen	○	○	○	○	○
	Right-hand drive or left-hand drive	○	○	○	○	○
	STILL Easy Control multifunction display	●	●	●	●	●
	Emergency vehicle lighting	○	○	○	○	○
Lights and protection	Flashing light	○	○	○	○	○
	STILL Flashlight: flashing light below the overhead guard	○	○	○	○	○
	Unbreakable/telescopic/heated exterior mirrors with curb mirrors	○	○	○	○	○
	Protection package for lights and frame	○	○	○	○	○
	Trucks are compliant with StVZO (German road traffic licensing regulations)	○	○	○	○	○
	FleetManager: access authorisation, shock detection, reports	○	○	○	○	○

● Standard ○ Option — Not available



Matriz San Luis Potosí

Carretera Federal 57 Km183 #950 C.P. 78420,
San Luis Potosí. S.L.P.
Tel: 444 738 01 07 al 10



Sucursales y puntos de servicio y venta

- Guadalajara, Jal.
- Toluca, Edo Mex.
- Monterrey, N.L.
- Aguascalientes, Ags.
- Puebla, Pue.
- Querétaro, Qro.
- Celaya, Gto.
- Silao / Irapuato / León
- Saltillo Coah.
- Tlalnepantla, Edo. Mex.
- San José Chiapa, Pue.
- Lagos de Moreno.
- Matehuala, SLP.
- San Miguel Allende, Gto.
- Cuautitlán Izcalli, Edo Mex.

info@still.de

STILL is certified in the following areas: Quality management, occupational safety, environmental protection and energy management



first in intralogistics



www.interpricelogistica.com



info@interpricelogistica.com